

FB Series

FB

MODEL	: FB
DESCRIPTION	: Bare channel fitting
RECOMMENDED INSTALLATION AREA	: Corridor, Plantroom, General Area
INGRESS PROTECTION (IP)	: IP 20
DIFFUSER OPTION	: N/A
REFLECTOR OPTION	: N/A


MODEL	WATTAGE	Length x W(A) x H(B) [mm]		
FB 1x14w/24w	1 x 14w or 24w	569	36	57
FB 2x14w/39w	2 x 14w or 24w	569	95	65
FB 1x28w/54w	1 x 28w or 54w	1169	36	57
FB 2x28w/54w	2 x 28w or 54w	1169	95	65
FB 1x35w/49w	1 x 35w or 49w	1469	36	57
FB 2x35w/49w	2 x 35w or 49w	1469	95	65
FB 1x80w	1 x 80w	1469	36	57
FB 2x80w	2 x 80w	1469	95	65



FBR

MODEL	: FBR
DESCRIPTION	: Channel fitting c/w metal reflector
RECOMMENDED INSTALLATION AREA	: Warehouse, Plantroom, Carpark
INGRESS PROTECTION (IP)	: IP 20
DIFFUSER OPTION	: N/A
REFLECTOR OPTION	: Epoxy gloss/matt Powder Coating

MODEL	WATTAGE	Length x W(A) x H(B) [mm]		
FBR 1x14w/24w	1 x 14w or 24w	570	125	72
FBR 2x14w/24w	2 x 14w or 24w	570	175	72
FBR 1x28w/54w	1 x 28w or 54w	1170	125	72
FBR 2x28w/54w	2 x 28w or 54w	1170	175	72
FBR 1x35w/49w	1 x 35w or 49w	1470	125	72
FBR 35w/49w	2 x 35w or 49w	1470	175	72
FBR 1x80w	1 x 80w	1470	125	72
FBR 2x80w	2 x 80w	1470	175	72

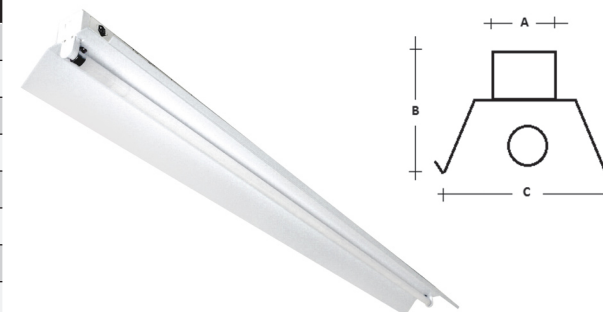

FBR-AR

MODEL	: FBR-AR
DESCRIPTION	: Channel fitting c/w aluminium reflector
RECOMMENDED INSTALLATION AREA	: Warehouse, Plantroom, Carpark
INGRESS PROTECTION (IP)	: IP 20
DIFFUSER OPTION	: N/A
REFLECTOR OPTION	: High Specular, Matt Finish

MODEL	WATTAGE	Length x W(A) x H(B) [mm]		
FBR-AR 1x14w/24w	1 x 14w or 24w	570	125	72
FBR-AR 2x14w/24w	2 x 14w or 24w	570	175	72
FBR-AR 1x28w/54w	1 x 28w or 54w	1170	125	72
FBR-AR 2x28w/54w	2 x 28w or 54w	1170	175	72
FBR-AR 1x35w/49w	1 x 35w or 49w	1470	125	72
FBR-AR 2x35w/49w	2 x 35w or 49w	1470	175	72
FBR-AR 1x80w	1 x 80w	1470	125	72
FBR-AR 2x80w	2 x 80w	1470	175	72

