
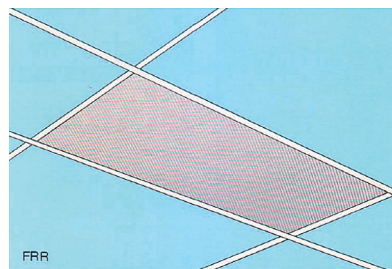


Recessed Mounted Series

FRR-P (Open Type)

MODEL	: FRR-P (Open Type)
DESCRIPTION	: Recessed Fitting c/w prismatic diffuser
RECOMMENDED INSTALLATION AREA	: Office Corridor, Kitchen, cafeteria
INGRESS PROTECTION (IP)	: IP20
DIFFUSER OPTION	: Prismatic, Opal
REFLECTOR OPTION	: Specular, Matt Aluminium Baseplate


MODEL	WATTAGE	Length x W(A) x H(B) [mm]		
FRR-P (Open Type) 120	1 x 18w	610	300	85
FRR-P (Open Type) 220	2 x 18w	610	300 / 600	85
FRR-P (Open Type) 320	3 x 18w	610	600	85
FRR-P (Open Type) 420	4 x 18w	610	600	85
FRR-P (Open Type) 140	1 x 36w	1220	300	85
FRR-P (Open Type) 240	2 x 36w	1220	300 / 600	85
FRR-P (Open Type) 340	3 x 36w	1220	600	85
FRR-P (Open Type) 440	4 x 36w	1220	600	85

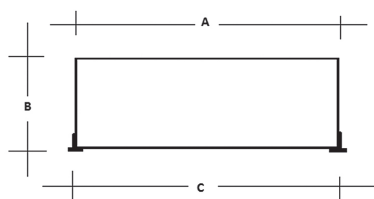

FRR-P (Frame Type)

MODEL	: FRR-P (Frame Type)
DESCRIPTION	: Recessed Fitting c/w prismatic diffuser
RECOMMENDED INSTALLATION AREA	: Office Corridor, Kitchen, cafeteria
INGRESS PROTECTION (IP)	: IP20
DIFFUSER OPTION	: Prismatic, Opal
REFLECTOR OPTION	: Specular, Matt Aluminium Baseplate

MODEL	WATTAGE	Length x W(A) x H(B) [mm]		
FRR-P (Frame Yype) 120	1 x 18w	610	300	85
FRR-P (Frame Yype) 220	2 x 18w	610	300 / 600	85
FRR-P (Frame Yype) 320	3 x 18w	610	600	85
FRR-P (Frame Yype) 420	4 x 18w	610	600	85
FRR-P (Frame Yype) 140	1 x 36w	1220	300	85
FRR-P (Frame Yype) 240	2 x 36w	1220	300 / 600	85
FRR-P (Frame Yype) 340	3 x 36w	1220	600	85
FRR-P (Frame Yype) 440	4 x 36w	1220	600	85

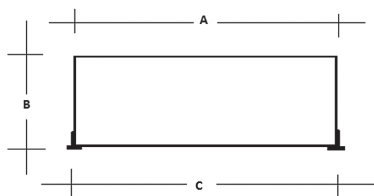


Recessed Mounted Series

FRH-ARL

MODEL	: FRH-ARL
DESCRIPTION	: Recessed Fitting c/w aluminium louvre reflector
RECOMMENDED INSTALLATION AREA	: General Office Area
INGRESS PROTECTION (IP)	: IP20
DIFFUSER OPTION	: N/A
REFLECTOR OPTION	: Specular, Matt Aluminium

MODEL	WATTAGE	Length x W(A) x H(B) [mm]		
FRH-ARL 120	1 x 18w	610	300	85
FRH-ARL 220	2 x 18w	610	300 / 600	85
FRH-ARL 320	3 x 18w	610	600	85
FRH-ARL 420	4 x 18w	610	600	85
FRH-ARL 140	1 x 36w	1220	300	85
FRH-ARL 240	2 x 36w	1220	300 / 600	85
FRH-ARL 340	3 x 36w	1220	600	85
FRH-ARL 440	4 x 36w	1220	600	85

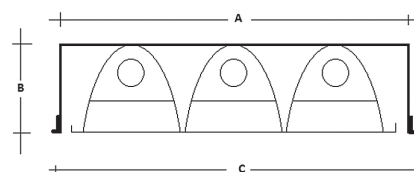

FRH-ARL/LB

MODEL	: FRH-ARL/LB
DESCRIPTION	: Recessed Fitting c/w low glare aluminium louvre reflector
RECOMMENDED INSTALLATION AREA	: Computer Intensive Office Area, Sports Hall
INGRESS PROTECTION (IP)	: IP20
DIFFUSER OPTION	: N/A
REFLECTOR OPTION	: Specular, matt aluminium reflector

MODEL	WATTAGE	Length x W(A) x H(B) [mm]		
FRH-ARL/LB 120	1 x 18w	610	300	85
FRH-ARL/LB 220	2 x 18w	610	300 / 600	85
FRH-ARL/LB 320	3 x 18w	610	600	85
FRH-ARL/LB 420	4 x 18w	610	600	85
FRH-ARL/LB 140	1 x 36w	1220	300	85
FRH-ARL/LB 240	2 x 36w	1220	300 / 600	85
FRH-ARL/LB 340	3 x 36w	1220	600	85
FRH-ARL/LB 440	4 x 36w	1220	600	85

