


Surface Series

FSSD-P

MODEL	: FSSD-P
DESCRIPTION	: Surface fitting c/w diffuser
RECOMMENDED INSTALLATION AREA	: Staircase, Corridor, Kitchen Area
INGRESS PROTECTION (IP)	: IP20
DIFFUSER OPTION	: Prismatic, Opal, Clear Acrylic
REFLECTOR OPTION	: Specular, matt aluminium reflector


MODEL	WATTAGE	Length x W(A) x H(B) [mm]		
FSSD-P 1x14w/24w	1 x 14w or 24w	600	125/300	85
FSSD-P 2x14w/24w	2 x 14w or 24w	600	125/300	85
FSSD-P 3x14w/24w	3 x 14w or 24w	600	600	85
FSSD-P 4x14w/24w	4 x 14w or 24w	600	600	85
FSSD-P 1x28w/54w	1 x 28w or 54w	1200	125/300	85
FSSD-P 2x28w/54w	2 x 28w or 54w	1200	125/300	85
FSSD-P 3x28w/54w	3 x 28w or 54w	1200	600	85
FSSD-P 4x28w/54w	4 x 28w or 54w	1200	600	85
FSSD-P 1x35w/49w	1 x 35w or 49w	1500	125/300	85
FSSD-P 2x35w/49w	2 x 35w or 49w	1500	125/300	85
FSSD-P 1x80w	1 x 80w	1500	125/300	85
FSSD-P 2x80w	2 x 80w	1500	125/300	85

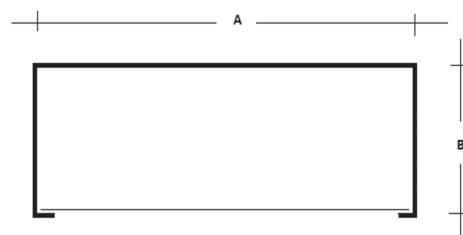

FSSD-ARL

MODEL	: FSSD-ARL
DESCRIPTION	: Surface fitting c/w aluminium louvre reflector
RECOMMENDED INSTALLATION AREA	: Office Area
INGRESS PROTECTION (IP)	: IP 20
DIFFUSER OPTION	: N/A
REFLECTOR OPTION	: Specular, matt aluminium reflector

MODEL	WATTAGE	Length x W(A) x H(B) [mm]		
FSSD-ARL 1x14w/24w	1 x 14w or 24w	600	300	85
FSSD-ARL 2x14w/24w	2 x 14w or 24w	600	300/600	85
FSSD-ARL 3x14w/24w	3 x 14w or 24w	600	600	85
FSSD-ARL 4x14w/24w	4 x 14w or 24w	600	600	85
FSSD-ARL 1x28w/54w	1 x 28w or 54w	1200	300	85
FSSD-ARL 2x28w/54w	2 x 28w or 54w	1200	300/600	85
FSSD-ARL 3x28w/54w	3 x 28w or 54w	1200	600	85
FSSD-ARL 4x28w/54w	4 x 28w or 54w	1200	600	85
FSSD-ARL 1x35w/49w	1 x 35w or 49w	1500	300	85
FSSD-ARL 2x35w/49w	2 x 35w or 49w	1500	300/600	85
FSSD-ARL 1x80w	1 x 80w	1500	300	85
FSSD-ARL 2x80w	2 x 80w	1500	300/600	85

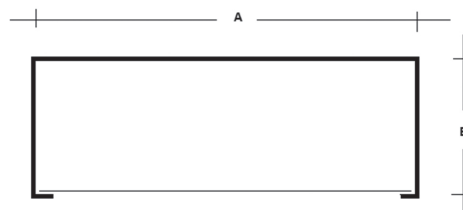


Surface Mounted Series

FSSD-LB

MODEL	: FSSD-LB
DESCRIPTION	: Surface fitting c/w low glare aluminium louvre reflector
RECOMMENDED INSTALLATION AREA	: Computer Intensive Office Area, Sports Hall
INGRESS PROTECTION (IP)	: IP20
DIFFUSER OPTION	: N/A
REFLECTOR OPTION	: Specular, matt aluminium reflector


MODEL	WATTAGE	Length x W(A) x H(B) [mm]		
FSSD-LB 1x14w/24w	1 x 14w or 24w	600	300	60
FSSD-LB 2x14w/24w	2 x 14w or 24w	600	300/600	60
FSSD-LB 3x14w/24w	3 x 14w or 24w	600	600	60
FSSD-LB 4x14w/24w	4 x 14w or 24w	600	600	60
FSSD-LB 1x28w/54w	1 x 28w or 54w	1200	300	60
FSSD-LB 2x28w/54w	2 x 28w or 54w	1200	300/600	60
FSSD-LB 3x28w/54w	3 x 28w or 54w	1200	600	60
FSSD-LB 4x28w/54w	4 x 28w or 54w	1200	600	60
FSSD-LB 1x35w/49w	1 x 35w or 49w	1500	300	60
FSSD-LB 2x35w/49w	2 x 35w or 49w	1500	300/600	60
FSSD-LB 1x80w	1 x 80w	1500	300	60
FSSD-LB 2x80w	2 x 80w	1500	300/600	60

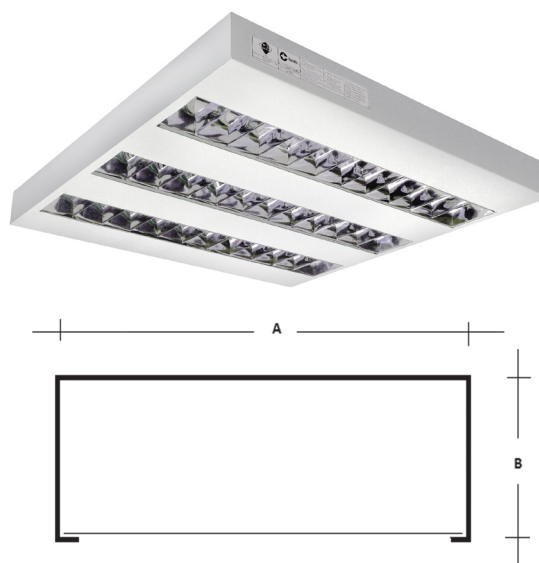

FSL

MODEL	: FSL
DESCRIPTION	: Surface mounted fitting
RECOMMENDED INSTALLATION AREA	: Corridor, Staircase
INGRESS PROTECTION (IP)	: IP20
DIFFUSER OPTION	: N/A
REFLECTOR OPTION	: Specular, matt aluminium reflector

MODEL	WATTAGE	Length x W(A) x H(B) [mm]		
FSL 1x14w/24w	1 x 14w or 24w	600	300	80
FSL 2x14w/24w	2 x 14w or 24w	600	300	80
FSL 1x28w/54w	1 x 28w or 54w	1200	300	80
FSL 2x28w/54w	2 x 28w or 54w	1200	300	80
FSL 1x35w/49w	1 x 35w or 49w	1500	300	80
FSL 2x35w/49w	2 x 35w or 49w	1500	300	80
FSL 1x80w	1 x 80w	1500	300	80
FSL 2x80w	2 x 80w	1500	300	80

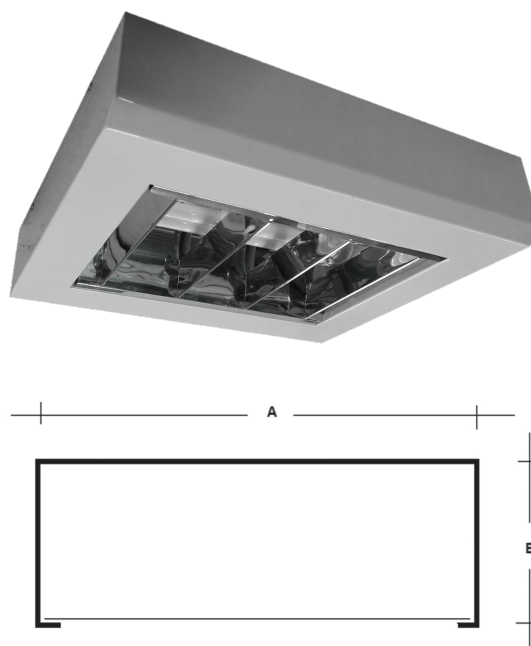


Surface Mounted Series

FRD-WG

MODEL	: FRD-WG
DESCRIPTION	: Recessed fitting c/w wire guard
RECOMMENDED INSTALLATION AREA	: Sports Arena (e.g Squash/Badminton Court)
INGRESS PROTECTION (IP)	: IP20
DIFFUSER OPTION	: N/A
REFLECTOR OPTION	: Matt Base reflector

MODEL	WATTAGE	Length x W(A) x H(B) [mm]		
FRD-WG 1x14w/24w	1 x 14w or 24w	600	300	85
FRD-WG 2x14w/24w	2 x 14w or 24w	600	300/600	85
FRD-WG 3x14w/24w	3 x 14w or 24w	600	600	85
FRD-WG 4x14w/24w	4 x 14w or 24w	600	600	85
FRD-WG 1x28w/54w	1 x 28w or 54w	1200	300	85
FRD-WG 2x28w/54w	2 x 28w or 54w	1200	300/600	85
FRD-WG 3x28w/54w	3 x 28w or 54w	1200	600	85
FRD-WG 4x28w/54w	4 x 28w or 54w	1200	600	85
FRD-WG 1x35w/49w	1 x 35w or 49w	1500	300	85
FRD-WG 2x35w/49w	2 x 35w or 49w	1500	300/600	85
FRD-WG 1x80w	1 x 80w	1500	300	85
FRD-WG 2x80w	2 x 80w	1500	300/600	85

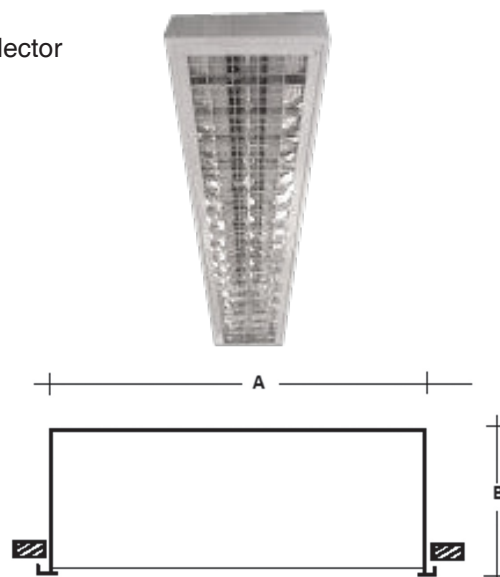

FLB-Surface

MODEL	: FLB-Surface
DESCRIPTION	: Surface Mounted T5 Low Bay
RECOMMENDED INSTALLATION AREA	: High Ceiling Warehouse, Multi Purpose Hall
INGRESS PROTECTION (IP)	: IP20
DIFFUSER OPTION	: Pyramid Prismatic, Opal, Tempered Glass
REFLECTOR OPTION	: Specular Aluminium Baseplate

MODEL	WATTAGE	Length x W(A) x H(B) [mm]		
FLB-Surface	1 x 14w or 24w	600	300	85 / 60
FLB-Surface	2 x 14w or 24w	600	300/600	85 / 60
FLB-Surface	1 x 28w or 54w	1200	300	85 / 60
FLB-Surface	2 x 28w or 54w	1200	300/600	85 / 60
FLB-Surface	1 x 35w or 49w	1500	300	85 / 60
FLB-Surface	2 x 35w or 49w	1500	300/600	85 / 60
FLB-Surface	1 x 80w	1500	300	85 / 60
FLB-Surface	2 x 80w	1500	300/600	85 / 60

