

OS FSL-165-500



OS BOL-1201





OS BOL-1202



OS BOL-1203
OS BOL-1603



OS BOL-1204
OS BOL-1604



Specifications:

- Body is Extruded From Aluminium
- Head is Die Cast From Aluminium Alloy
- Root Mounting Kit of Die Cast Aluminium Alloy
- Electrostatically Polyester Powder Coated
- Nylon Connecting Devices
- Ceramic Lampholder (E27)
- Anodized High Purity Aluminium Louver
- Acrylic Clear Diffuser
- Stainless Steel Screws
- Pre-Looping With Textile Silicone Wire
- Sealed With Silicone Gasket
- Surface Land Mounted

OSRAM LED Bulb (E27)

SDCM ≤ 6, CRI ≥ 80Ra

CCT (K)

2700K / 3000K / 6500K

AC Input


AC 220-240V, 50/60Hz, PF ≥ 0.5

Lifespan (Hrs)

≥ 10000Hrs

Available Colour:

- Matt Black
- Matt White
- Matt Silver

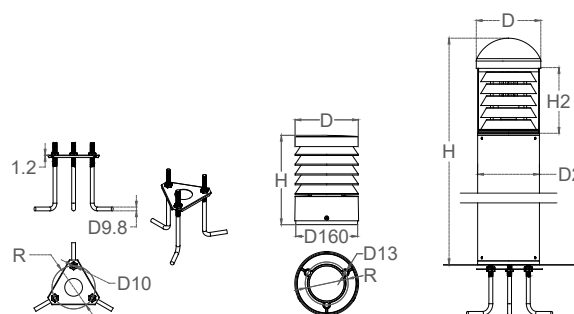

Model	Head Shape	Recommended LED Lamp	Lamp Base	Dimension (mm)				
				D x H	D2	H2	R	
OS BOL-1201	Round	LED VALUESTICK 7W / 10W	E27	120 x 850	120	-	80	
OS BOL-1202	Flat		E27	120 x 850	120	-	80	
OS BOL-1203	Round	LED STAR CLASSIC A70 9W	E27	126 x 850	120	105	80	
OS BOL-1204	Flat		E27	126 x 850	120	105	80	
OS BOL-1603	Round	LED VALUE CLASSIC A60 9.5W	E27	167 x 1000	160	170	112	
OS BOL-1604	Flat		E27	167 x 1000	160	170	112	
OS FSL-165	Round	LED VALUESTICK 7W / 10W	E27	163.5 x 231	-	-	111	
OS FSL-165-500	Round		E27	163.5 x 500	-	-	112	

*OSRAM LED STAR CLASSIC A70 9W = 850lm (865)

*OSRAM LED VALUE CLASSIC A60 9.5W = 750lm (830)

*OSRAM LED VALUESTICK 7W = 700lm (827) & 750lm (865)

*OSRAM LED VALUESTICK 10W = 1050lm (827) & 1100lm (865)



OS & VIP BUL Series - LED Buried-Up Lights

Outdoor Lighting | Professional & Consumer Luminaires



** BUL-1718-P
** BUL-2121-P



** BUL-1719-L
** BUL-2123-L



Specifications:

- Rim & Housing is Die Cast From Aluminium Alloy
- Electrostatically Polyester Powder Coated
- Anodized Aluminium Reflector *(if Applicable)*
- Mild Steel Mounting Base
- Tempered Glass Clear
- Lampholder of Ceramic *(E27)*
- Sealed With Silicone Gasket
- Stainless Steel Screws
- Nylon Connecting Devices
- Recessed Mounted

OSRAM LED Module (COB)

SDCM ≤ 3 , CRI ≥ 80 Ra (TM30 Compliant)
3000K / 4000K
50000Hrs

VIP LED Module (SMD)

SDCM ≤ 4 , CRI ≥ 80 Ra
3000K / 4000K / 6000K
30000Hrs

OSRAM LED Lamp (E27)


SDCM ≤ 6 , CRI ≥ 80 Ra
2700K / 3000K / 6500K
10000Hrs

LED Driver *(Built-In / Separate)*

AC 220-240V, 50/60Hz,
PF ≥ 0.9 (DC) / PF ≥ 0.55 (AC)

Available Colour:

- Matt Black
- Matt White
- Matt Silver



Model (DC)	Facet	LED Lumen (lm)			LED Power (W)	Beam Angle (°)	Dimension (mm)			
		3000K	4000K	6000K			D	D2	H	H2
OS BUL-1718-P	Flat	2760	2900	-	25.9	15° / 24° / 40°	165	114	282	178
		4550	4780	-	37.6	24° / 40° / 60°				
VIP BUL-1718-P	Flat	3200	3200	3200	32.1	24° / 40°	208	158	405	208
OS BUL-2121-P	Flat	2760	2900	-	25.9	15° / 24° / 40°				
OS BUL-2121-P	Flat	4550	4780	-	37.6	24° / 40° / 60°	165	114	282	193
		3200	3200	3200	32.1	24° / 40°				
VIP BUL-1719-L	Linear	3200	3200	3200	32.1	24° / 40°	208	158	405	225
OS BUL-1719-L	Linear	2760	2900	-	25.9	15° / 24° / 40°				
OS BUL-2123-L	Linear	4550	4780	-	37.6	24° / 40° / 60°	165	114	282	193
		3200	3200	3200	32.1	24° / 40°				
VIP BUL-2123-L	Linear	3200	3200	3200	32.1	24° / 40°	208	158	405	225
OS BUL-2123-L	Linear	2760	2900	-	25.9	15° / 24° / 40°				

Professional Type, OSRAM LED PL-CN111 or LED VIP111

Model (AC)	Facet	Recommended LED Lamp	Lamp Base	Dimension (mm)			
				D	D2	H	H2
OS BUL-1718-P	Flat	LED STAR CLASSIC A70 9W	E27	165	114	282	178
OS BUL-2121-P	Flat		E27	208	158	405	208
OS BUL-1719-L	Linear	LED VALUESTICK 7W / 10W	E27	165	114	282	193
OS BUL-2123-L	Linear		E27	208	158	405	225

Consumer Type

OSRAM LED STAR CLASSIC A70 9W = 850lm (865) / OSRAM LED VALUE CLASSIC A60 9.5W = 750lm (830) / OSRAM LED VALUESTICK 7W = 700lm (827) & 750lm (865)
OSRAM LED VALUESTICK 10W = 1050lm (827) & 1100lm (865)

Max. Operating Temperature at Ta 0°C to +35°C

YLI INDUSTRY SDN. BHD. Reserves the rights to alternate the specification of its product at any time without prior notice.



OS SL-1101



OS SL-1102



*** SL-1103



*** SL-1104



Specifications:

- Rim & Housing is Die Cast From Aluminium Alloy
- Electrostatically Polyester Powder Coated
- Anodized Aluminium Reflector
- Tempered Glass Clear / Dot Frosted Diffuser
- Control Gear Chamber (***** SL-1103 & 4**)
- Lampholder of Ceramic (**GU10**)
- Sealed With Silicone Gasket
- Waterproof Cable Entry
- Stainless Steel Screws
- Nylon Connecting Devices
- Surface Mounted

LED Driver (Built-In / Separate)

AC 220-240V, 50/60Hz,
PF ≥ 0.9 (DC) / PF ≥ 0.55 (AC)

Available Colour:

- Matt Black
- Matt White
- Matt Silver

OSRAM LED Module (COB)


SDCM ≤ 3, CRI ≥ 80Ra (TM30 Compliant)
3000K / 4000K
50000Hrs

VIP LED Module (SMD)

SDCM ≤ 4, CRI ≥ 80Ra
3000K / 4000K / 6000K
30000Hrs

OSRAM LED Lamp (GU10)

SDCM ≤ 6, CRI ≥ 80Ra
2700K / 6500K
15000Hrs

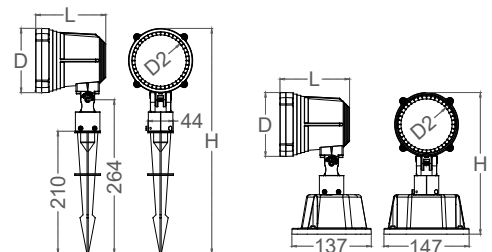

Model (VIP)	System Lumen (lm)	System Power (W)	System Current (A)	Beam Angle (°)	Dimension (mm)			
					D	D2	L	H
VIP SL-1103	900	10	0.04	24° / 40°	110	88	120	245
VIP SL-1104	900	10	0.04	24° / 40°	110	88	158	245

Consumer Type, LED VIP111 3000K, 4000K & 6000K

Model	OSRAM LED PAR16 (AC)			or	OSRAM PL-CN50-DC-COB-G1 (DC)			Beam Angle (°)	Dimension (mm)			
	2700K	6500K	(W)		3000K	4000K	(W)		D	D2	L	H
OS SL-1101	380	420	4.7		-	-	-	24° / 36°	110	88	120	386
OS SL-1102	380	420	4.7		-	-	-	24° / 36°	110	88	158	386
OS SL-1103	-	-	-		900	900	12.3	15° / 24° / 40°	110	88	120	245
					1400	1400	12.9	24° / 40°				
OS SL-1104	-	-	-		900	900	12.3	15° / 24° / 40°	110	88	158	245
					1400	1400	12.9	24° / 40°				

Professional Type, OSRAM LED PAR16 2700K & 6500K or OSRAM LED PL-CN50 3000K & 4000K



OS & VIP Series - LED Lawn Spotlights


Outdoor Lighting | Professional & Consumer Luminaires



*** SL-1106



*** SL-1356



Specifications:

- Rim & Housing is Die Cast From Aluminium Alloy
- Electrostatically Polyester Powder Coated
- Anodized Aluminium Reflector (***) SL-110*)
- Tempered Glass Clear / Dot Frosted Diffuser
- Control Gear Chamber
- Sealed With Silicone Gasket
- Waterproof Cable Entry
- Stainless Steel Screws
- Nylon Connecting Devices
- Surface Mounted

OSRAM LED Module (COB)

SDCM ≤ 3 , CRI ≥ 80 Ra (TM30 Compliant)
3000K / 4000K
50000Hrs

VIP LED Module (SMD)

SDCM ≤ 4 , CRI ≥ 80 Ra
3000K / 4000K / 6000K
30000Hrs

Beam Angle


15° / 24° / 40° / 60°

LED Driver

AC 220-240V, 50/60Hz, PF ≥ 0.9

Available Colour:

- Matt Black
- Matt White
- Matt Silver



Model (VIP)	System Lumen (lm)	LED Power (W)	System Current (A)	Beam Angle (°)	Dimension (mm)			
					D	D2	L	H
VIP SL-1105	900	8	0.04	24° / 40°	110	88	120	455
VIP SL-1106	900	8	0.04	24° / 40°	110	88	158	455
VIP SL-1356	3200	32.1	0.16	24° / 40°	135	100	178	480

Consumer Type, LED VIP50 & VIP111 3000K, 4000K & 6000K

Model (OS)	System Lumen (lm)		LED Power (W)	System Current (A)	Beam Angle (°)	Dimension (mm)			
	3000K	4000K				D	D2	L	H
OS SL-1105	900	900	12.3	0.07	15° / 24° / 40°	110	88	120	455
	1400	1400	12.9	0.07	24° / 40°				
OS SL-1106	900	900	12.3	0.07	15° / 24° / 40°	110	88	158	455
	1400	1400	12.9	0.07	24° / 40°				
OS SL-1356	2760	2900	25.9	0.11	15° / 24° / 40°	135	100	178	480
	4550	4780	37.6	0.17	24° / 40° / 60°				

Professional Type, OSRAM LED PL-CN50 & PL-CN111 2700K, 3000K & 4000K



OS SL-1351



*** SL-1355



Specifications:

- Rim & Housing is Die Cast From Aluminium Alloy
- Electrostatically Polyester Powder Coated
- Tempered Glass Clear Diffuser
- Control Gear Chamber (***** SL-1355**)
- Sealed With Silicone Gasket
- Waterproof Cable Entry
- Stainless Steel Screws
- Nylon Connecting Devices
- Surface Mounted

Available Colour:

- Matt Black
- Matt White
- Matt Silver

OSRAM LED Module (COB)

SDCM ≤ 3 , CRI ≥ 80 Ra (TM30 Compliant)
3000K / 4000K
50000Hrs

VIP LED Module (SMD)


SDCM ≤ 4 , CRI ≥ 80 Ra
3000K / 4000K / 6000K
30000Hrs

Beam Angle

15° / 24° / 40° / 60°

LED Driver

AC 220-240V, 50/60Hz, PF ≥ 0.9

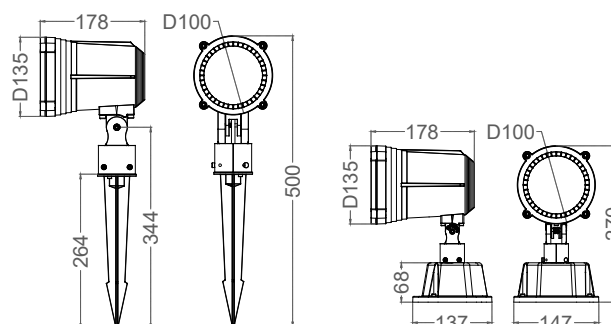

Model	Recommended LED Lamp	Lamp Base	Dimension (mm)
OS SL-1351 (AC)	LED PAR30	E27	As Shown

Consumer Type, Suitable For LED PAR30, E27 Retrofit Lamp (AC Type)

Model	LED Lumen (lm)			LED Power (W)	System Current (A)	Beam Angle (°)	Dimension (mm)
	3000K	4000K	6000K				
OS SL-1355	2760	2900	-	25.9	0.11	15° / 24° / 40°	As Shown
	4550	4780	-	37.6	0.17	24° / 40° / 60°	
VIP SL-1355	3200	3200	3200	32.1	0.16	24° / 40°	

Professional Type, OSRAM LED PL-CN111 3000K & 4000K or LED VIP111 3000K, 4000K & 6000K