





CONTINUOUS RECESSED LED LINEAR LIGHT

INTRODUCTION



【ACL180】

DIMENSION: [UNIT: MM]

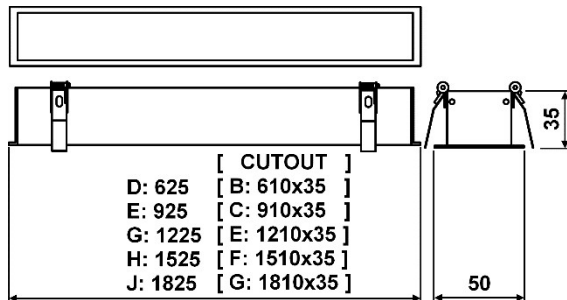

FEATURES

Creative Innovation of Optimized LED Technology
Seamless Connection Freedom Lighting
Perfect Combination of Lighting and Space
Color Rendering Index Ra>80 【Ra>90】
Long Lifespan Design>50,000hours
Working Temperature: -20℃~50℃

MATERIALS & FINISH

LED Branding: EPISTAR
External Driver Branding: GTE
GTE' Patent Aluminum Radiator Profile
High Efficiency Frosted PC Diffuser

INSTALLATION

Installation: False Ceiling Recessed
Suitable for Interior Ceiling Light, like Office.....

STANDARDS

Designed and Manufactured to Comply with
TUV/GS/CE/RoHS/EMF/SAA/Erp/UL/cUL/FCC
IP20 Protection, Class II & I Electric

OPTIONS

LED Color Temperature: CCT2000~6500K
LED Color: Red, Green, Blue, Amber, RGB, RGBW
LED Branding: PHILIPS, CREE, OSRAM
Driver Branding: PHILIPS, TRIDONIX
[CBE] Emergency Version: 3W or 5W or 10W
Dimming: 1-10V, Triac, DALI, RF, ZIGBEE, DMX512, WIFI
Housing Finish Color:



MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT 【V】
GTR7111D-12W-WW	12W	60X0.5W SMD2835	3000K	960	>0.9	120°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~277V] 50/60Hz [DC24V]
GTR7111D-12W-NW			4000K	980				
GTR7111D-12W-CW			6000K	1000				
GTR7111D22-12W-CW	2C@12W	24CW	WW CW	720	>0.9			
GTR7111D42-12W-RGBW	4C@12W	24RGBW	R G B W	600	>0.5			
GTR7111D52-12W-RGBCW	5C@12W	24RGB+24CW	R G B WW	720	>0.5			
GTR7111E-18W-WW	18W	96X0.5W SMD2835	3000K	1450	>0.9	120°		
GTR7111E-18W-NW			4000K	1480				
GTR7111E-18W-CW			6000K	1530				
GTR7111G-24W-WW	24W	120X0.5W SMD2835	3000K	1950	>0.9	120°		
GTR7111G-24W-NW			4000K	2000				
GTR7111G-24W-CW			6000K	2050				
GTR7111G22-24W-CW	2C@24W	48CW	WW CW	1440	>0.9			
GTR7111G42-24W-RGBW	4C@24W	48RGBW	R G B W	1200	>0.5			
GTR7111G52-24W-RGBCW	5C@24W	48RGB+48CW	R G B WW	1440	>0.5			
GTR7111H-30W-WW	30W	144X0.5W SMD2835	3000K	2400	>0.9	120°		
GTR7111H-30W-NW			4000K	2460				
GTR7111H-30W-CW			6000K	2530				
GTR7111J-36W-WW	36W	192x0.5W SMD2835	3000K	2900	>0.9	120°		
GTR7111J-36W-NW			4000K	2960				
GTR7111J-36W-CW			6000K	3060				

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

INTRODUCTION

FEATURES

Creative Innovation of Optimized LED Technology
Seamless Connection Freedom Lighting
Perfect Combination of Lighting and Space
Color Rendering Index Ra>80 【Ra>90】
Long Lifespan Design>50,000hours
Working Temperature: -20°C~50°C

MATERIALS & FINISH

LED Branding: EPISTAR
External Driver Branding: GTE
GTE' Patent Aluminum Radiator Profile
High Efficiency Frosted PC Diffuser

INSTALLATION

Installation: False Ceiling Recessed
Suitable for Interior Ceiling Light, like Office.....


STANDARDS

Designed and Manufactured to Comply with
TUV/GS/CE/RoHS/EMF/SAA/Erp/UL/cUL/FCC
IP20 Protection, Class II & I Electric



OPTIONS

LED Color Temperature: CCT2000~6500K
LED Color: Red, Green, Blue, Amber, RGB, RGBW
LED Branding: PHILIPS, CREE, OSRAM
Driver Branding: PHILIPS, TRIDONIX
[BDU] Version: "U-type" Diffuser
[CBE] Emergency Version: 3W or 5W or 10W
Dimming: 1-10V, Triac, DALI, RF, ZIGBEE, DMX512, WIFI
Housing Finish Color:


SILVER **WHITE** **BLACK** **BROWN**
【HSV】 【HWT】 【HBK】 【HBR】

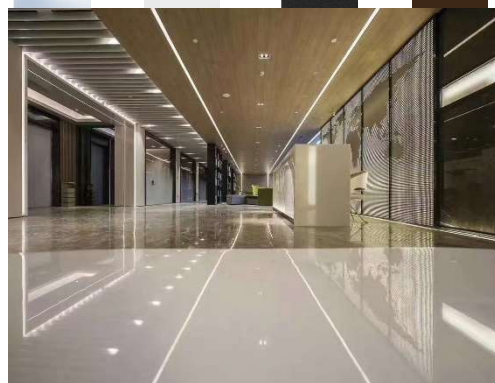

CONTINUOUS RECESSED LED LINEAR LIGHT



PROFILE



[BDU]

SPRING CLIP




【ACL180】

【ACL90】

【ACT90】

【ACX90】

DIMENSION: 【UNIT: MM】

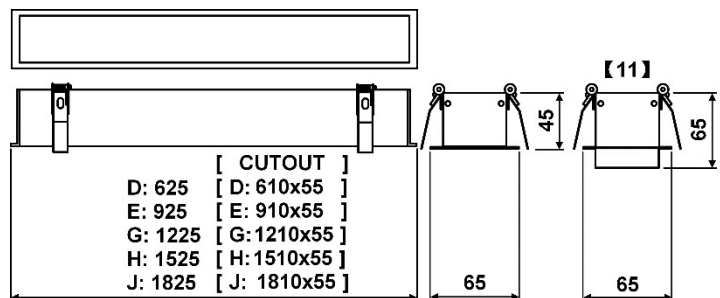


MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT 【V】
GTR7112D-20W-WW	20W	120x0.5W SMD2835	3000K	2000	>0.9	120° 180°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~277V] 50/60Hz [DC24V]
GTR7112D-20W-NW			4000K	2050				
GTR7112D-20W-CW			6000K	2120				
GTR7112D22-20W-CW	2C@20W	48CW	WW CW	1700	>0.9			
GTR7112D42-24W-RGBW	4C@24W	48RGBW	R G B W	1680	>0.5			
GTR7112D52-24W-RGBCW	5C@24W	48RGB+48CW	R G B WW	1680	>0.5			
GTR7112E-30W-WW	30W	180x0.5W SMD2835	3000K	3000	>0.9	120° 180°		
GTR7112E-30W-NW			4000K	3060				
GTR7112E-30W-CW			6000K	3150				
GTR7112G-40W-WW	40W	240x0.5W SMD2835	3000K	4000	>0.9	120° 180°		
GTR7112G-40W-NW			4000K	4100				
GTR7112G-40W-CW			6000K	4300				
GTR7112G22-40W-CW	2C@40W	96CW	WW CW	3400	>0.9			
GTR7112G42-48W-RGBW	4C@48W	96RGBW	R G B W	3360	>0.5			
GTR7112G52-48W-RGBCW	5C@48W	96RGB+96CW	R G B WW	3360	>0.5			
GTR7112H-50W-WW	50W	300x0.5W SMD2835	3000K	5000	>0.9	120° 180°		
GTR7112H-50W-NW			4000K	5100				
GTR7112H-50W-CW			6000K	5250				
GTR7112J-60W-WW	60W	360x0.5W SMD2835	3000K	6000	>0.9	120° 180°		
GTR7112J-60W-NW			4000K	6120				
GTR7112J-60W-CW			6000K	6300				

NOTE:

All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.


CONTINUOUS RECESSED LED LINEAR LIGHT




PROFILE



【11】



SPRING CLIP



【ACL180】



【ACL90】




【ACT90】



【ACX90】

DIMENSION: [UNIT: MM]

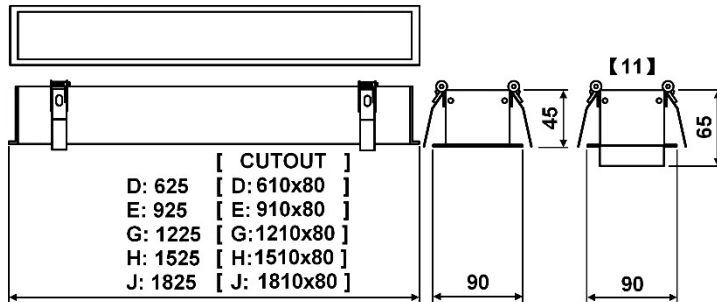

INTRODUCTION

FEATURES

Creative Innovation of Optimized LED Technology
Seamless Connection Freedom Lighting
Perfect Combination of Lighting and Space
Color Rendering Index Ra>80 【Ra>90】
Long Lifespan Design>50,000hours
Working Temperature: -20°C~50°C

MATERIALS & FINISH

LED Branding: EPISTAR
External Driver Branding: GTE
GTE' Patent Aluminum Radiator Profile
High Efficiency Frosted PC Diffuser

INSTALLATION

Installation: False Ceiling Recessed
Suitable for Interior Ceiling Light, like Office.....

STANDARDS

Designed and Manufactured to Comply with
TUV/GS/CE/RoHS/EMF/SAA/Erp/UL/cUL/FCC
IP20 Protection, Class II & I Electric

OPTIONS

LED Color Temperature: CCT2000~6500K
LED Color: Red, Green, Blue, Amber, RGB, RGBW
LED Branding: PHILIPS, CREE, OSRAM
Driver Branding: PHILIPS, TRIDONIX
[BDU] Version: "U-type" Diffuser
[CBE] Emergency Version: 3W or 5W or 10W
Dimming: 1-10V, Triac, DALI, RF, ZIGBEE, DMX512, WIFI
Housing Finish Color:



MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT 【V】
GTR7113D-30W-WW	30W	180x0.5W SMD2835	3000K	3000	>0.9	120° 180°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~277V] 50/60Hz [DC24V]
GTR7113D-30W-NW			4000K	3060				
GTR7113D-30W-CW			6000K	3150				
GTR7113D22-30W-CW	2C@30W	72CW	WW CW	2550	>0.9			
GTR7113D42-36W-RGBW	4C@36W	72RGBW	R GB W	2520	>0.5			
GTR7113D52-36W-RGBCW	5C@36W	72RGB+72CW	R GB WW	2520	>0.5			
GTR7113E-40W-WW	40W	270x0.5W SMD2835	3000K	4000	>0.9	120° 180°		
GTR7113E-40W-NW			4000K	4100				
GTR7113E-40W-CW			6000K	4200				
GTR7113G-60W-WW	60W	360x0.5W SMD2835	3000K	6000	>0.9	120° 180°		
GTR7113G-60W-NW			4000K	6150				
GTR7113G-60W-CW			6000K	6300				
GTR7113G22-60W-CW	2C@60W	144CW	WW CW	5100	>0.9			
GTR7113G42-72W-RGBW	4C@72W	144RGBW	R GB W	5040	>0.5			
GTR7113G52-72W-RGBCW	5C@72W	144RGB+144CW	R GB WW	5040	>0.5			
GTR7113H-70W-WW	70W	450x0.5W SMD2835	3000K	7000	>0.9	120° 180°		
GTR7113H-70W-NW			4000K	7150				
GTR7113H-70W-CW			6000K	7300				
GTR7113J-80W-WW	80W	540x0.5W SMD2835	3000K	8000	>0.9	120° 180°		
GTR7113J-80W-NW			4000K	8150				
GTR7113J-80W-CW			6000K	8400				

NOTE:

All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

INTRODUCTION

FEATURES

Creative Innovation of Optimized LED Technology
Seamless Connection Freedom Lighting
Perfect Combination of Lighting and Space
Color Rendering Index Ra>80 【Ra>90】
Long Lifespan Design>50,000hours
Working Temperature: -20°C~50°C

MATERIALS & FINISH

LED Branding: EPISTAR
External Driver Branding: GTE
GTE' Patent Aluminum Radiator Profile
High Efficiency Frosted PC Diffuser

INSTALLATION

Installation: False Ceiling Recessed
Suitable for Interior Ceiling Light, like Office.....

STANDARDS

Designed and Manufactured to Comply with
TUV/GS/CE/RoHS/EMF/SAA/Erp/UL/cUL/FCC
IP20 Protection, Class II & I Electric


OPTIONS

LED Color Temperature: CCT2000~6500K
LED Color: Red, Green, Blue, Amber, RGB, RGBW
LED Branding: PHILIPS, CREE, OSRAM
Driver Branding: PHILIPS, TRIDONIX
[CBE] Emergency Version: 3W or 5W or 10W
Dimming: 1-10V, Triac, DALI, RF, ZIGBEE, DMX512, WIFI
Housing Finish Color:


SILVER 【HSV】	WHITE 【HWT】	BLACK 【HBK】	BROWN 【HBR】
			



CONTINUOUS RECESSED LED LINEAR LIGHT



PROFILE



SPRING CLIP






【ACL180】

【ACL90】

【ACT90】

【ACX90】

DIMENSION: 【UNIT: MM】

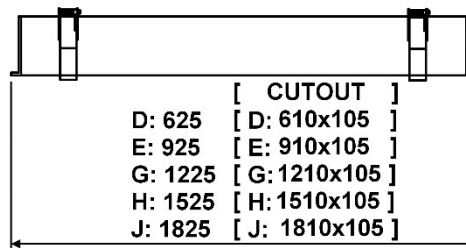


MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT 【V】
GTR7115D-40W-WW	40W	240x0.5W SMD2835	3000K	4000	>0.9	120° 180°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~277V] 50/60Hz [DC24V]
GTR7115D-40W-NW			4000K	4100				
GTR7115D-40W-CW			6000K	4200				
GTR7115D22-40W-CW	2C@30W	96CW	WW CW	3400	>0.9			
GTR7115D42-48W-RGBW	4C@36W	96RGBW	R G B W	3360	>0.5			
GTR7115D52-48W-RGBCW	5C@36W	96RGB+96CW	R G B WW	3360	>0.5			
GTR7115E-60W-WW	60W	360x0.5W SMD2835	3000K	6000	>0.9	120° 180°		
GTR7115E-60W-NW			4000K	6150				
GTR7115E-60W-CW			6000K	6300				
GTR7115G-80W-WW	80W	480x0.5W SMD2835	3000K	8000	>0.9	120° 180°		
GTR7115G-80W-NW			4000K	8150				
GTR7115G-80W-CW			6000K	8400				
GTR7115G22-80W-CW	2C@60W	192CW	WW CW	6800	>0.9			
GTR7115G42-96W-RGBW	4C@72W	192RGBW	R G B W	6720	>0.5			
GTR7115G52-96W-RGBCW	5C@72W	192RGB+192CW	R G B WW	6720	>0.5			
GTR7115H-100W-WW	100W	600x0.5W SMD2835	3000K	10000	>0.9	120° 180°		
GTR7115H-100W-NW			4000K	10200				
GTR7115H-100W-CW			6000K	10500				
GTR7115J-120W-WW	120W	720x0.5W SMD2835	3000K	12000	>0.9	120° 180°		
GTR7115J-120W-NW			4000K	12250				
GTR7115J-120W-CW			6000K	12600				

NOTE:

All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

CONTINUOUS RECESSED LED LINEAR LIGHT


INTRODUCTION



PROFILE



[BDU]



"N" CLIP



【ACL180】



【ACL90】



【ACT90】



【ACX90】

FEATURES

Creative Innovation of Optimized LED Technology
Seamless Connection Freedom Lighting
Perfect Combination of Lighting and Space
Color Rendering Index $Ra > 80$ 【 $Ra > 90$ 】
Long Lifespan Design $> 50,000$ hours
Working Temperature: $-20^{\circ}\text{C} \sim 50^{\circ}\text{C}$

MATERIALS & FINISH

LED Branding: EPISTAR
External Driver Branding: GTE
GTE' Patent Aluminum Radiator Profile
High Efficiency Frosted PC Diffuser

INSTALLATION

Installation: False Ceiling Recessed
Suitable for Interior Ceiling Light, like Office.....

STANDARDS


Designed and Manufactured to Comply with
TUV/GS/CE/RoHS/EMF/SAA/Erp/UL/cUL/FCC
IP20 Protection, Class II & I Electric

OPTIONS

LED Color Temperature: CCT2000~6500K
LED Color: Red, Green, Blue, Amber, RGB, RGBW
LED Branding: PHILIPS, CREE, OSRAM
Driver Branding: PHILIPS, TRIDONIX, MEANWELL
[BDU] Version: "U-type" Diffuser
[CBE] Emergency Version: 3W or 5W or 10W
Dimming Type: 1-10V, Triac, DALI, RF, DMX512, WIFI
Housing Finish Color:



DIMENSION: [UNIT: MM]

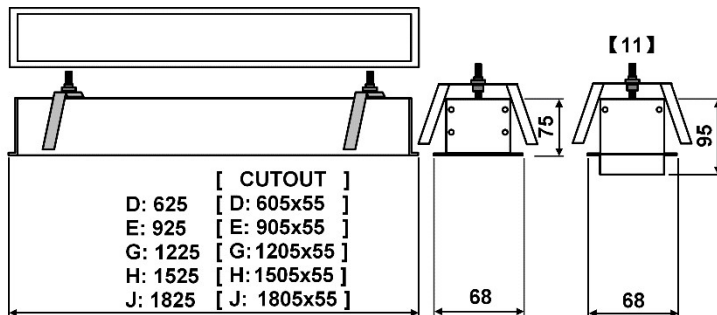

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT 【V】
GTR7132D-20W-WW	20W	120x0.5W SMD2835	3000K	2000	>0.9	120° 180°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~277V] 50/60Hz [DC24V]
GTR7132D-20W-NW			4000K	2050				
GTR7132D-20W-CW			6000K	2120				
GTR7132D22-20W-CW	2C@20W	48CW	WW CW	1700	>0.9			
GTR7132D42-24W-RGBW	4C@24W	48RGBW	R GB W	1680	>0.5			
GTR7132D52-24W-RGBCW	5C@24W	48RGB+48CW	R GB WW	1680	>0.5			
GTR7132E-30W-WW	30W	180x0.5W SMD2835	3000K	3000	>0.9	120° 180°		
GTR7132E-30W-NW			4000K	3060				
GTR7132E-30W-CW			6000K	3150				
GTR7132G-40W-WW	40W	240x0.5W SMD2835	3000K	4000	>0.9	120° 180°		
GTR7132G-40W-NW			4000K	4100				
GTR7132G-40W-CW			6000K	4300				
GTR7132G22-40W-CW	2C@40W	96CW	WW CW	3400	>0.9			
GTR7132G42-48W-RGBW	4C@48W	96RGBW	R GB W	3360	>0.5			
GTR7132G52-48W-RGBCW	5C@48W	96RGB+96CW	R GB WW	3360	>0.5			
GTR7132H-50W-WW	50W	300x0.5W SMD2835	3000K	5000	>0.9	120° 180°		
GTR7132H-50W-NW			4000K	5100				
GTR7132H-50W-CW			6000K	5250				
GTR7132J-60W-WW	60W	360x0.5W SMD2835	3000K	6000	>0.9	120° 180°		
GTR7132J-60W-NW			4000K	6120				
GTR7132J-60W-CW			6000K	6300				

NOTE:

All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are $\pm 10\%$, tolerance of color rendering index is ± 5 .

INTRODUCTION

FEATURES

Creative Innovation of Optimized LED Technology
Seamless Connection Freedom Lighting
Perfect Combination of Lighting and Space
Color Rendering Index Ra>80 【Ra>90】
Long Lifespan Design>50,000hours
Working Temperature: -20°C~50°C

MATERIALS & FINISH

LED Branding: EPISTAR
External Driver Branding: GTE
GTE' Patent Aluminum Radiator Profile
High Efficiency Frosted PC Diffuser

INSTALLATION

Installation: False Ceiling Recessed
Suitable for Interior Ceiling Light, like Office.....


STANDARDS

Designed and Manufactured to Comply with
TUV/GS/CE/RoHS/EMF/SAA/Erp/UL/cUL/FCC
IP20 Protection, Class II & I Electric



OPTIONS

LED Color Temperature: CCT2000~6500K
LED Color: Red, Green, Blue, Amber, RGB, RGBW
LED Branding: PHILIPS, CREE, OSRAM
Driver Branding: PHILIPS, TRIDONIX, MEANWELL
[BDU] Version: "U-type" Diffuser
[CBE] Emergency Version: 3W or 5W or 10W
Dimming Type: 1-10V, Triac, DALI, RF, DMX512, WIFI
Housing Finish Color:


SILVER **WHITE** **BLACK** **BROWN**
【HSV】 【HWT】 【HBK】 【HBR】

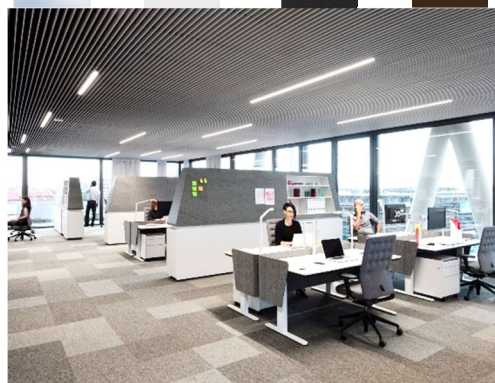


CONTINUOUS RECESSED LED LINEAR LIGHT



PROFILE



【11】 PROFILE



"N" CLIP



【ACL180】



【ACL90】




【ACT90】



【ACX90】

DIMENSION: 【UNIT: MM】

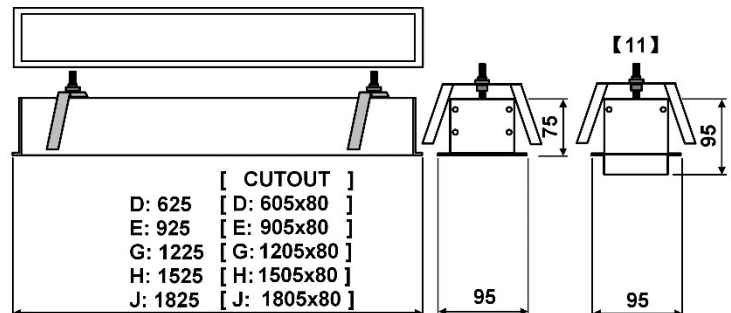


MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT 【V】	
GTR7133D-30W-WW	30W	180x0.5W SMD2835	3000K	3000	>0.9	120° 180°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~277V] 50/60Hz [DC24V]	
GTR7133D-30W-NW			4000K	3060					
GTR7133D-30W-CW			6000K	3150					
GTR7133D22-30W-CW	2C@30W	72CW	WW CW	2550	>0.9				
GTR7133D42-36W-RGBW	4C@36W	72RGBW	R G B W	2520	>0.5				
GTR7133D52-36W-RGBCW	5C@36W	72RGB+72CW	R G B WW	2520	>0.5				
GTR7133E-40W-WW	40W	270x0.5W SMD2835	3000K	4000	>0.9	120° 180°			
GTR7133E-40W-NW			4000K	4100					
GTR7133E-40W-CW			6000K	4200					
GTR7133G-60W-WW	60W	360x0.5W SMD2835	3000K	6000	>0.9				120° 180°
GTR7133G-60W-NW			4000K	6150					
GTR7133G-60W-CW			6000K	6300					
GTR7133G22-60W-CW	2C@60W	144CW	WW CW	5100	>0.9				
GTR7133G42-72W-RGBW	4C@72W	144RGBW	R G B W	5040	>0.5				
GTR7133G52-72W-RGBCW	5C@72W	144RGB+144CW	R G B WW	5040	>0.5				
GTR7133H-70W-WW	70W	450x0.5W SMD2835	3000K	7000	>0.9	120° 180°			
GTR7133H-70W-NW			4000K	7150					
GTR7133H-70W-CW			6000K	7300					
GTR7133J-80W-WW	80W	540x0.5W SMD2835	3000K	8000	>0.9				120° 180°
GTR7133J-80W-NW			4000K	8150					
GTR7133J-80W-CW			6000K	8400					


NOTE:

All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

CONTINUOUS RECESSED LED LINEAR LIGHT



PROFILE



"N" CLIP



【ACL180】



【ACL90】




【ACT90】



【ACX90】

DIMENSION: [UNIT: MM]

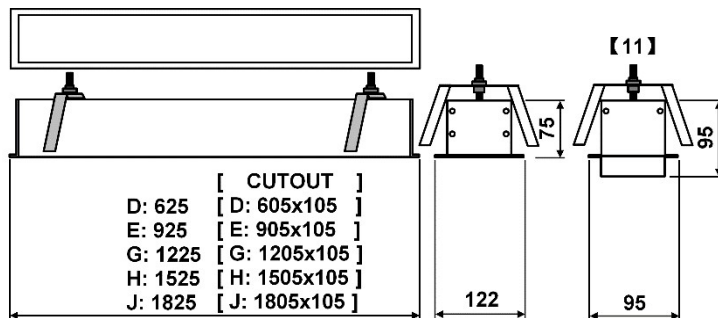

INTRODUCTION

FEATURES

Creative Innovation of Optimized LED Technology
Seamless Connection Freedom Lighting
Perfect Combination of Lighting and Space
Color Rendering Index Ra>80 【Ra>90】
Long Lifespan Design>50,000hours
Working Temperature: -20°C~50°C

MATERIALS & FINISH

LED Branding: EPISTAR
External Driver Branding: GTE
GTE' Patent Aluminum Radiator Profile
High Efficiency Frosted PC Diffuser

INSTALLATION


Installation: False Ceiling Recessed
Suitable for Interior Ceiling Light, like Office.....

STANDARDS

Designed and Manufactured to Comply with
TUV/GS/CE/RoHS/EMF/SAA/Erp/UL/cUL/FCC
IP20 Protection, Class II & I Electric

OPTIONS

LED Color Temperature: CCT2000~6500K
LED Color: Red, Green, Blue, Amber, RGB, RGBW
LED Branding: PHILIPS, CREE, OSRAM
Driver Branding: PHILIPS, TRIDONIX, MEANWELL
[CBE] Emergency Version: 3W or 5W or 10W
Dimming Type: 1-10V, Triac, DALI, RF, DMX512, WIFI
Housing Finish Color:

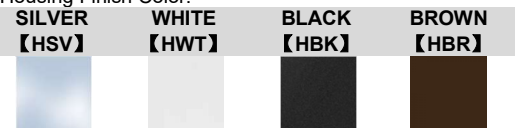

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT 【V】
GTR7135D-40W-WW	40W	240x0.5W SMD2835	3000K	4000	>0.9	120° 180°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~277V] 50/60Hz [DC24V]
GTR7135D-40W-NW			4000K	4100				
GTR7135D-40W-CW			6000K	4200				
GTR7135D22-40W-CW			2C@30W	96CW				
GTR7135D42-48W-RGBW	4C@36W	96RGBW	R G B W	3360	>0.5			
GTR7135D52-48W-RGBCW	5C@36W	96RGB+96CW	R G B WW	3360	>0.5			
GTR7135E-60W-WWV	60W	360x0.5W SMD2835	3000K	6000	>0.9	120° 180°		
GTR7135E-60W-NWV			4000K	6150				
GTR7135E-60W-CW			6000K	6300				
GTR7135G-80W-WWV			80W	480x0.5W SMD2835		3000K		
GTR7135G-80W-NWV	4000K	8150						
GTR7135G-80W-CW	6000K	8400						
GTR7135G22-80W-CW	2C@60W	192CW			WW CW	6800		
GTR7135G42-96W-RGBW	4C@72W	192RGBW	R G B W	6720	>0.5			
GTR7135G52-96W-RGBCW	5C@72W	192RGB+192CW	R G B WW	6720	>0.5			
GTR7135H-100W-WWV	100W	600x0.5W SMD2835	3000K	10000	>0.9	120° 180°		
GTR7135H-100W-NWV			4000K	10200				
GTR7135H-100W-CW			6000K	10500				
GTR7135J-120W-WW			120W	720x0.5W SMD2835		3000K		
GTR7135J-120W-NW	4000K	12250						
GTR7135J-120W-CW	6000K	12600						

NOTE:

All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

INTRODUCTION

FEATURES

Creative Innovation of Optimized LED Technology
Perfect Combination of Lighting and Space
Color Rendering Index Ra>80 【Ra>90】
Long Lifespan Design>50,000hours
Working Temperature: -20°C~50°C

MATERIALS & FINISH

LED Branding: EPISTAR
External Driver Branding: GTE
GTE' Patent Aluminum Radiator Profile
High Efficiency Frosted PC Diffuser

INSTALLATION

Installation: False Ceiling Recessed
Suitable for Interior Ceiling Light, like Office.....

STANDARDS

Designed and Manufactured to Comply with
TUV/GS/CE/RoHS/EMF/SAA/Erp/UL/cUL/FCC
IP20 Protection, Class I Electric


OPTIONS

LED Color Temperature: CCT2000~6500K
LED Color: Red, Green, Blue, Amber, RGB, RGBW
LED Branding: PHILIPS, CREE, OSRAM
Driver Branding: PHILIPS, TRIDONIX, MEANWELL
Dimming: 1-10V, Triac, DALI, RF, ZIGBEE, DMX512, WIFI
Housing Finish Color:

SILVER 【HSV】	WHITE 【HWT】	BLACK 【HBK】	BROWN 【HBR】
			



RECESSED LED LINEAR LIGHT




PROFILE



【ACL180】



DIMENSION: 【UNIT: MM】

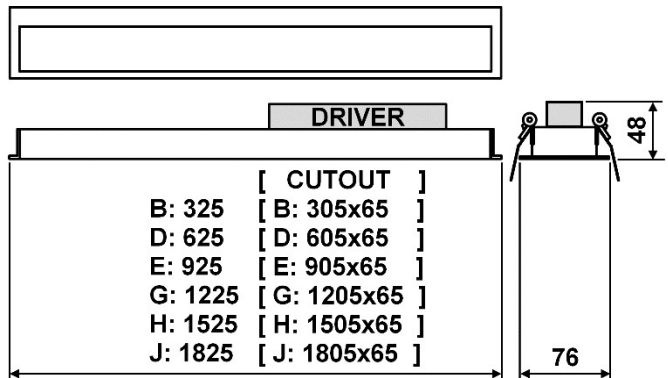

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT 【V】		
GTR7361B-6W-WW	6W	24x1.5W SMD3030	3000K	600	>0.9	120°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]		
GTR7361B-6W-NW			4000K	610						
GTR7361B-6W-CW			6000K	620						
GTR7361B22-6W-CW	2C@6W	18C+18W	WW	CW	>0.9					
GTR7361B42-6W-RGBW	4C@6W	18RGBW	R	G	B				W	>0.5
GTR7361B52-6W-RGBCW	5C@6W	18RGB+18CW	R	G	B				WW	>0.5
GTR7361D-12W-WW	12W	48x1.5W SMD3030	3000K	1000	>0.9	120°				
GTR7361D-12W-NW			4000K	1030						
GTR7361D-12W-CW			6000K	1050						
GTR7361D22-12W-CW	2C@12W	36C+36W	WW	CW	>0.9					
GTR7361D42-12W-RGBW	4C@12W	36RGBW	R	G	B				W	>0.5
GTR7361D52-12W-RGBCW	5C@12W	36RGB+36CW	R	G	B				WW	>0.5
GTR7361E-18W-WW	18W	72x0.5W SMD2835	3000K	1500	>0.9	120°				
GTR7361E-18W-NW			4000K	1550						
GTR7361E-18W-CW			6000K	1570						
GTR7361G-24W-WW	24W	96x0.5W SMD3030	3000K	2000	>0.9	120°				
GTR7361G-24W-NW			4000K	2050						
GTR7361G-24W-CW			6000K	2100						
GTR7361G22-24W-CW	2C@24W	72C+72W	WW	CW	>0.9					
GTR7361G42-24W-RGBW	4C@24W	72RGBW	R	G	B				W	>0.5
GTR7361G52-24W-RGBCW	5C@24W	72RGB+72CW	R	G	B				WW	>0.5
GTR7361H-30W-WW	30W	120x0.5W SMD3030	3000K	2500	>0.9	120°				
GTR7361H-30W-NW			4000K	2580						
GTR7361H-30W-CW			6000K	2630						
GTR7361J-36W-WW	36W	144x0.5W SMD3030	3000K	3000	>0.9	120°				
GTR7361J-36W-NW			4000K	3100						
GTR7361J-36W-CW			6000K	3150						

NOTE:

All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.